
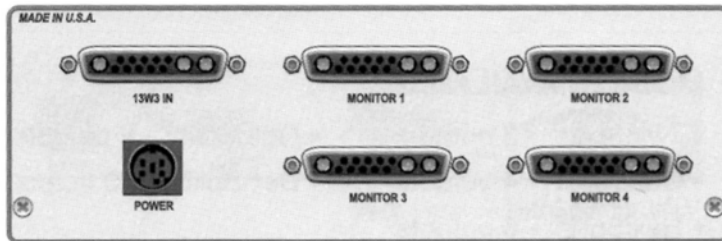


SPLITTERS for 13W3

Fully-buffered two and four output distribution amplifiers for high-resolution workstation images

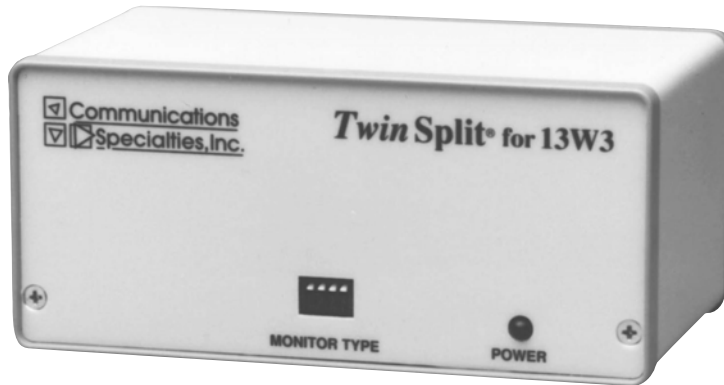

Back Panel Drawing of QuadSplit for 13W3 (1504)

1502/1504 (13W3 Splitters)

PART #	NAME	# OF OUTPUTS
1502	TwinSplit®	2
1504	QuadSplit®	4

Description and Features:

Connect multiple high-resolution monitors to a workstation source

Compatible with Sun®, SGI and NeXt workstations at resolutions up to 1600 x 1280

Operates at distances up to 250 feet

300 MHz bandwidth

Compact, all metal casing

Input and output connectors located on rear

Designed for easy rackmounting

Unit comes with UL/CSA/CE approved power supply and one 10-ft. input cable. Output cables must be purchased separately

Ordering Information:

Part Number	Description
1502-pp	TwinSplit for 13W3
1504-pp	QuadSplit for 13W3
1248	Single rackmount kit for one 1502 unit
1244	Single rackmount kit for one 1504 unit
1249	Double rackmount kit for two 1502 units
1245	Double rackmount kit for two 1504 units
1146-012	12-ft. extension cable w/13W3 M/F termination
1146-025	25-ft. extension cable w/13W3 M/F termination
1146-050	50-ft. extension cable w/13W3 M/F termination
1146-100	100-ft. extension cable w/13W3 M/F termination

Power Supply Suffix Codes: (Line Cord)

pp: NA N. America JP Japan
 AU Australia UK United Kingdom
 EU Europe



Specifications:

EQUIPMENT INCLUDED:

- 13W3 Splitter unit
- UL/CSA/CE approved power supply (230 Volts AC/50 Hz TUV/CE approved tabletop supply is also available)
- 10-ft. 13W3-M to 13W3-M input cable to connect from workstation output
- User's manual

DIMENSIONS:

- TwinSplit: 5.5 W x 2.5 H x 3.25 D (inches); 140 W x 64 H x 83 D (mm)
- QuadSplit: 7.25 W x 2.5 H x 3.25 D (inches); 184 W x 64 H x 83 D (mm)
- Weight: Approx. 4 lbs. for each unit, including power supply (1.8 kg)

POWER:

- TwinSplit: 120 volts AC, 60 Hz wall plug-in power supply or 230 volts AC, 50 Hz tabletop
- QuadSplit: 120 volts AC, 60 Hz wall plug-in power supply or 100-230 volts AC, 47-63 Hz tabletop
- UL/CSA/TUV/CE approved

INPUT/OUTPUT:

- All input and output connectors are 13W3-F connectors
- All sync outputs can drive either TTL loads or be terminated in 75 Ohms
- RGB outputs drive standard 75 Ohm loads
- Power connector is 5-pin mini-DIN-F
- Monitor type switch is used to set the monitor sync type used by workstation

1502/1504 (13W3 Splitters)

PART #	NAME	# OF OUTPUTS
1502	TwinSplit®	2
1504	QuadSplit®	4

Warranty:

TwinSplit and QuadSplit for 13W3 are backed by a three-year limited warranty on parts and labor, plus a 30-day satisfaction guarantee*.

*See website for terms and conditions.



UPDATED 2/28/05

All specifications are subject to change without notice. TwinSplit and QuadSplit are registered trademarks of Communications Specialties, Inc. All others are property of their respective owners. © 2005.

