


XA/RA-1900A, XR-1900, XA-1903

Fiber optic transmission of IRIG time-code signals, configured for point-to-point, point-to-multipoint or drop-and-repeat signal distribution

Ideal Applications:

Military and the Aerospace Industries

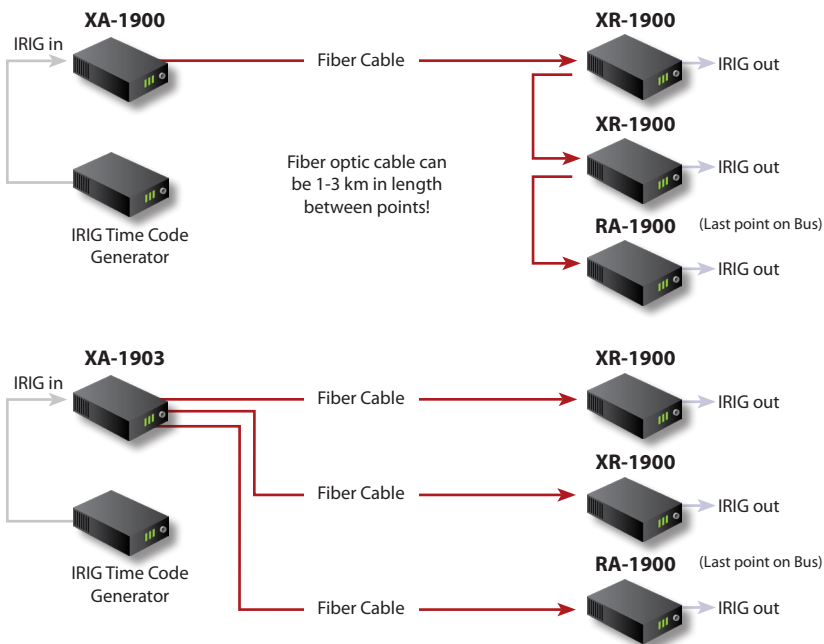

Signal	Channels	Direction
XA-1900/RA-1900 - Analog		
IRIG	1	→
XR-1900 - Analog		
IRIG	1	↔
XA-1903 - Analog		
IRIG	1	→

Features

Transmits IRIG and similar NASA and NBS standard instrumentation time-code formats up to 100 kHz

Combinations of four different units may be configured to provide point-to-point, point-to-multipoint or drop-and-repeat signal distribution. Each unit must be purchased separately

Built-in regulated power supplies allow operation from unregulated AC or DC sources

Transmits at 850 nm or 1310 nm over standard multimode or single mode fiber

System can be configured for four wire modem or AFSK applications

XA/RA-1900A and XR-1900 models may be mounted in the MCR-1000A card cage. The XA-1903 is provided in a 19" rackmountable enclosure

Ordering Information

Part Number	Description	Number of Fibers
XA-1900-1	Transmitter Box, 850 nm, Multimode	1
XA-1900-3	Transmitter Box, 1310 nm, Multimode	1
XA-1900-7	Transmitter Box, 1310 nm, Single Mode	1
RA-1900-1	Receiver Box, 850 nm, Multimode	1
RA-1900-3	Receiver Box, 1310 nm, Multimode	1
RA-1900-7	Receiver Box, 1310 nm, Single Mode	1
XR-1900-1	Transceiver Box, 850 nm, Multimode	2
XR-1900-3	Transceiver Box, 1310 nm, Multimode	2
XR-1900-7	Transceiver Box, 1310 nm, Single Mode	2
XA-1903-1	Transmitter Box, 850 nm, Multimode	10
XA-1903-3	Transmitter Box, 1310 nm, Multimode	10
MCR-1000A*	Rackmountable Card Cage	
AP-1000	Adaptor plate for mounting XA/RA-1900 units within MCR-1000A card cage	
XP-1000A	115 volts AC, 50/60 Hz plug-in adaptor	
XP-1001	230 volts AC, 50/60 Hz plug-in adaptor	

*To order a rackmounted version of the XR-1900, add "/MCR" to the part number, followed by a "-1"; "-3" or "-7". To order rackmounted versions of the XA/RA-1900, order an AP-1000 for use with each unit. Each module occupies one slot in the MCR-1000A card cage. Please note that the card versions of these products are NOT compatible with the model 6000A card cage used with most Fiberlink products.

The XA-1903 is provided in a 19" rackmountable enclosure.

Sales



CSI Communications Specialties, Inc.

631-273-0404 | commspecial.com
info@commspecial.com

Data Specifications

Number of Channels	1
Number of Outputs per Channel	XA/RA/XR-1900: 1, XA-1903: 10
IRIG Compatibility	A through H
System Bandwidth (+0, -3 dB)	20 Hz to 100 kHz
Input/Output Load Impedance	600 Ohms nominal
Input/Output Signal Voltage	1 volt rms
Signal/Noise Ratio	67 dB typical
Noise Floor (full bandwidth)	1.3 mv rms maximum

General Specifications

Number of Fibers	XA/RA-1900: 1 fiber XR-1900: 2 fibers XA-1903: 10 fibers
Operating Temperature	-20 to +60° C
Operating Power (per unit)	+15 to +25 volts DC @ 250 mA or 14 to 18 volts AC, 50/60 Hz
Dimensions	XA-1900 and RA-1900: 5 W x 1.25 H x 2.5 L (inches) 127 W x 32 H x 64 L (mm) XR-1900: 5.75 W x 1.25 H x 4 L (inches) 146 W x 32 H x 102 L (mm) XA-1903: 19 W x 1.75 H x 6.5 L (inches) 483 W x 45 H x 165 L (mm)
Weight	XA-1900, RA-1900, XR-1900: Approx. 1 lb; 0.45 kg XA-1903: Approx. 3 lbs; 1.36 kg
Optical Connectors	ST: Multimode, FCPC: Single Mode
Optical Wavelength	850 nm/MM, 1310 nm/MM, 1310 nm/SM
Optical Fiber	50 or 62.5 micron multimode fiber, 8/10 micron single mode

About CSI

Communications Specialties, Inc. (CSI) is an award-winning manufacturer of Pro A/V products for the distribution, conversion or transmission of television and computer video signals, including fiber optic transmission systems, scan converters and video scalars. The company was founded in 1983 by veterans of the broadcast industry. Since then, CSI has managed to consistently design innovative products that are used worldwide by Fortune 500 Companies in a variety of markets such as Broadcast/Professional A/V, Video Conferencing, Education, Home Theater, Security, ITS, Industrial Monitoring, and more!

Also from CSI: Scan Do® Scan Converters and Deuce® Video Scalars



GSA Schedule
Contract GS-03F-5063C

Operating Loss Budget & Maximum Usable Distance*

Fiber Type	Loss(dB)
50 micron	0-10
62.5 micron	0-13
8/10 micron	0-10

For system to operate properly, operating loss budget must not be exceeded.

Want to learn more about fiber?

Log on to commspecial.com for fiber related resources written for Pro A/V Professionals by Pro A/V Professionals!



Backed by a 30-day satisfaction guarantee and a three-year limited warranty on parts and labor. See website for terms and conditions.

Sales



CSI Communications Specialties, Inc.

631-273-0404 | commspecial.com
info@commspecial.com

UPDATED 7/7/2009

All specifications subject to change without notice. © 2009
Fiberlink and the starburst logo are registered trademarks of Communications Specialties, Inc. CSI and the triangle designs are trademarks of Communications Specialties, Inc.

